


# PIERŚCIENIE H

d <sub>1</sub>	s	C							H				DANE						
		Δ	d <sub>3</sub>	Δ	b	d <sub>4</sub>	(kg/1000)	d <sub>2</sub>	Δ	m min.	t	d <sub>42</sub>	n	FN (kN)	FR (kN)	g	FRg (kN)	n <sub>def.</sub> x1000 (rpm)	
3	0.40	-0.05	2.18	±0.06	0.90	3.98	0.02	2.3	-0.07	0.44	0.35	4.1	1.0	0.24	0.50	0.40	0.40	95	
4	0.40		3.00	1.00	1.00	5.00	0.04	3.2		0.44	0.40	5.2	1.2	0.37	0.50	0.40	0.40	90	
5	0.60		3.80	1.20	1.20	6.20	0.08	4.0		0.64	0.50	6.4	1.5	0.58	1.10	0.60	0.70	88	
6	0.70		4.80	1.30	1.30	7.40	0.11	5.0		0.74	0.50	7.6	1.0	0.72	1.65	0.70	1.10	80	
6.5	0.70		5.60	1.30	1.30	8.20	0.12	5.8		0.74	0.35	8.4	1.0	0.55	1.70	1.05	1.05	76	
7	0.80	±0.09	5.80	±0.09	1.40	8.60	0.13	6.0	-0.09	0.85	0.50	8.8	1.5	0.85	2.20	0.80	1.30	69	
8	0.80		6.80		1.60	10.00	0.17	7.0		0.85	0.50	10.2	0.98	2.20	1.00	1.30	67		
9	1.00		7.80		1.70	11.20	0.22	8.0		1.10	0.50	11.4	1.10	3.50	2.00	58			
10	1.00		8.75		1.70	12.15	0.26	9.0		1.10	0.50	12.4	1.24	3.70	2.00	50			
11	1.00		9.65		1.80	13.20	0.29	10.0		1.10	0.50	13.6	1.35	4.00	2.00	40			
12	1.00	±0.18	10.55	±0.18	1.90	14.35	0.32	10.9	-0.11	1.10	0.55	14.7	1.7	1.65	4.20	1.00	2.00	35	
13	1.00		11.40		2.00	15.40	0.36	11.8		1.10	0.60	15.8	1.8	4.50	2.00	30			
14	1.00		12.30		2.00	16.30	0.40	12.7		1.10	0.65	16.7	2.0	5.00	2.00	27			
15	1.00		13.20		2.10	17.40	0.46	13.6		1.10	0.70	17.8	2.1	5.50	2.00	25			
16	1.00		14.10		2.20	18.50	0.54	14.5		1.10	0.75	18.9	2.3	6.00	2.00	24			
17	1.00	-0.06	14.90	±0.21	2.25	19.40	0.64	15.4	-0.21	1.10	0.80	19.9	2.4	3.40	6.00	1.00	2.00	23	
18	1.20		15.80		2.30	20.40	0.72	16.3		1.30	0.85	20.9	2.6	8.50	1.20	2.80	21		
19	1.20		16.70		2.40	21.50	0.80	17.2		1.30	0.90	22.0	2.7	9.00	2.80	21			
20	1.20		17.55		2.55	22.65	0.87	18.1		1.30	0.95	23.2	2.9	9.40	3.00	20			
22	1.20		19.40		2.80	25.00	1.10	19.9		1.30	1.05	25.5	3.2	1.00	3.00	17			
23	1.20	±0.25	20.20	±0.25	2.90	26.00	1.15	20.8	-0.25	1.30	1.10	26.6	3.3	6.20	10.50	1.20	3.20	15	
24	1.20		21.10		3.00	27.10	1.52	21.7		1.30	1.15	27.7	3.5	6.80	11.00	3.20	15		
25	1.20		22.00		3.15	28.30	1.74	22.6		1.30	1.20	28.9	3.6	7.50	11.50	3.20	15		
26	1.20		22.90		3.25	29.40	1.88	23.5		1.30	1.25	30.0	3.8	8.00	12.00	3.20	15		
28	1.50		24.60		3.50	31.60	2.32	25.2		1.60	1.40	32.2	4.2	9.70	16.50	1.50	5.50	13	
30	1.50	±0.39	26.30	±0.39	3.70	33.70	2.43	27.0	-0.25	1.60	1.50	34.4	4.5	11.00	17.00	1.50	5.60	13	
32	1.50		28.10		4.00	36.10	3.02	28.8		1.60	1.60	36.8	4.6	12.50	18.00	5.80	13		
35	1.50		30.80		4.30	39.40	3.30	31.5		1.60	1.75	40.1	5.3	15.00	20.00	5.80	11		
36	1.75		31.70		4.40	40.50	4.40	32.4		1.85	1.80	41.2	5.4	16.00	25.00	1.75	8.30	10	
38	1.75		33.40		4.60	42.60	4.62	34.2		1.85	1.90	43.4	5.7	17.50	26.00	8.50	10		
40	1.75	-0.07	35.20	±0.39	4.90	45.00	5.05	36.0	-0.25	1.85	2.00	45.8	6.0	20.00	27.50	1.75	8.80	9	
42	1.75		37.00		5.10	47.20	5.46	37.8		1.85	2.10	48.0	6.3	21.50	28.00	8.90	9		
45	1.75		39.60		5.50	50.60	5.98	40.5		1.85	2.25	51.5	6.8	25.00	30.00	9.00	8		
48	1.75		42.30		5.90	54.10	7.82	43.2		1.85	2.40	55.0	7.2	28.00	32.00	9.00	8		
50	2.00		44.00		6.20	56.40	8.85	45.0		2.15	2.50	57.4	7.5	31.00	39.50	2.00	12.00	7	
52	2.00	2.00	46.00	±0.39	6.30	58.60	9.33	47.0	-0.25	2.15	2.50	59.6	7.5	32.00	41.00	2.00	12.00	7	
55	2.00		48.50		6.50	61.50	10.40	50.0		2.15	2.50	63.0	7.5	34.00	43.00	12.00	7		

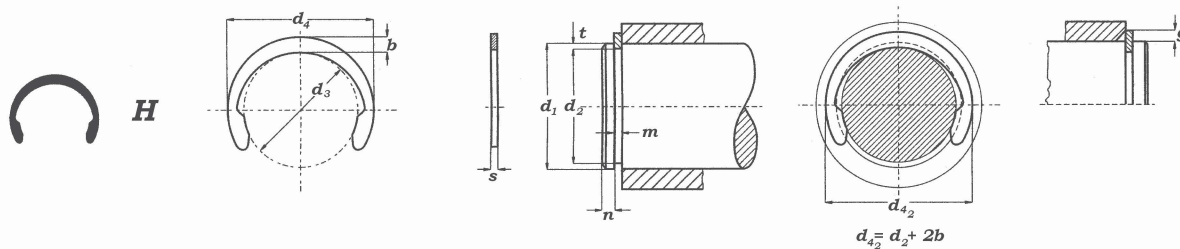

**industrial - inox**

ul. Władysława Łokietka 167B/a, 31-263 Kraków, tel./fax: 012 415 15 01  
kom. 601 53 33 66, 504 25 99 11, e-mail: industrial@segery.com.pl www.segery.eu