


PIERŚCIEŃ RB - DIN 7993

d ₁	C					H					C					H											
	d ₇	d ₃	Δ	e	Δ (kg/1000)	d ₂	Δ	r	d ₁	d ₇	d ₃	Δ	e	Δ (kg/1000)	d ₂	Δ	r	d ₁	d ₇	d ₃	Δ	e	Δ (kg/1000)	d ₂	Δ	r	
7	0.8	7.9	+0.3	4	0.071	7.8	±0.05	0.5	45	2.5	48.8		16	4.89	47.5		1.4										1.4
8	0.8	8.9		4	0.083	8.8		0.5	48	2.5	51.0		16	5.24	50.5		1.4										1.4
10	0.8	10.9		4	0.108	10.8		0.5	50	2.5	53.0		16	5.51	52.5		1.4										1.4
12	1.0	13.2		6	0.196	13.0		0.6	55	3.2	58.9		20	9.77	58.2	+0.8	1.8										1.8
14	1.0	15.2	+0.4	6	0.234	15.0		0.6	60	3.2	63.9		20	10.76	63.2		1.8										1.8
16	1.6	17.8		8	0.706	17.6		0.9	65	3.2	68.9		20	11.75	68.2		1.8										1.8
18	1.6	19.8		8	0.804	19.6		0.9	70	3.2	74.0		25	12.44	73.2		1.8										1.8
20	2.0	22.3		10	1.320	22.0		1.1	75	3.2	79.0		25	13.43	78.2		1.8										1.8
22	2.0	24.3		10	1.470	24.0		1.1	80	3.2	84.0		25	14.42	83.2	+1.0	1.8										1.8
24	2.0	26.3		10	1.630	26.0		1.1	85	3.2	89.0		25	15.41	88.2		1.8										1.8
25	2.0	27.3	+0.5	10	1.700	27.0		1.1	90	3.2	94.0		25	16.40	93.2		1.8										1.8
26	2.0	28.3		10	1.790	28.0		1.1	95	3.2	99.0		25	17.39	98.2		1.8										1.8
28	2.0	30.3		10	1.940	30.0		1.1	100	3.2	104.2		32	17.98	103.2		1.8										1.8
30	2.0	32.3		10	2.100	32.0	±0.10	1.1	105	3.2	109.2		32	18.98	108.2		1.8										1.8
32	2.5	34.9		12	3.470	34.5		1.4	110	3.2	114.2		32	19.97	113.2		1.8										1.8
35	2.5	37.9	+0.6	12	3.850	37.5		1.4	115	3.2	119.2		32	20.96	118.2	+1.2	1.8										1.8
38	2.5	40.9		12	4.200	40.5		1.4	120	3.2	124.2		32	21.95	123.2		1.8										1.8
40	2.5	42.9		12	4.430	42.5		1.4	125	3.2	129.2		32	22.94	128.2		1.8										1.8
42	2.5	45.0	+0.8	16	4.540	44.5		1.4																			1.8

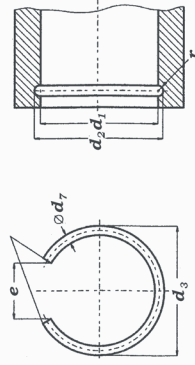

RB - DIN 7993