


PIERŚCIEŃ SP - DIN 5417

D	D A N E																				
	s	Δ	b	Δ	d ₃	Δ	e	r	r min.	Δ	d ₂	Δ	m	Δ	d _{d2}	FN (kN)	FR (kN)	g	FRg (kN)	K (kN/mm)	nobl. x1000 (rpm)
30	1.12		3.25		27.4		3	0.4	2.8		28.17		1.35		34.7	13.7	22.2	2.0	3.90	32.0	16
32	1.12		3.25		29.4		3	0.4	3.0		30.15		1.35		36.7	14.6	20.6		3.66	30.0	13
35	1.12		3.25		32.4	+0.4	3	0.4	3.2		33.17		1.35		39.7	16.0	19.0		3.52	28.0	11
37	1.12		3.25		34.0		3	0.4	3.4		34.77		1.35		41.3	20.7	17.8		3.22	26.6	10
40	1.12		3.25		37.3		3	0.4	3.6		38.10		1.35		44.6	19.3	16.0		2.96	24.2	8
42	1.12		3.25		38.9		3	0.4	3.8		39.75		1.35		46.3	23.5	15.2	2.0	2.85	23.4	7
44	1.12		3.25		40.9		3	0.4	4.0		41.75		1.35	-0.25	48.3	24.6	14.6		2.75	22.6	7
47	1.12		4.04		43.7	+0.5	4	0.4	5.3		44.60		1.35		52.7	28.8	16.3		3.12	25.6	7
50	1.12		4.04		46.6		4	0.4	5.8		47.60		1.35		55.7	30.6	15.2		2.97	24.3	6
52	1.12		4.04		48.8		4	0.4	5.9		49.73		1.35		57.9	31.6	14.5	2.5	2.30	23.4	6
55	1.12		4.04		51.7		4	0.4	6.2		52.60		1.35		60.7	33.8	13.4	2.5	2.16	22.0	5
56	1.12		4.04		52.4		4	0.4	6.5		53.60		1.35		61.7	34.5	13.2		2.14	21.0	5
58	1.12		4.04		54.4		4	0.4	6.7		55.60		1.35		63.7	35.6	12.6		2.06	21.0	5
62	1.70		4.04		58.2		4	0.6	10.5		59.61		1.90		67.7	38.1	40.6		6.75	69.0	5
65	1.70		4.04		61.2		4	0.6	11.0		62.60		1.90		70.7	40.0	38.4		6.50	66.0	4
68	1.70	-0.1	4.85		63.4		5	0.6	12.6		64.82		1.90		74.6	55.5	43.0	2.5	7.30	75.0	4
72	1.70		4.85	-0.15	67.4		5	0.6	14.7		68.81		1.90	+0.3	78.6	59.0	40.0		6.95	71.0	4
75	1.70		4.85		70.4	+0.8	5	0.6	15.3		71.83		1.90		81.6	61.5	37.2		6.60	67.0	3
80	1.70		4.85		75.4		5	0.6	16.3		76.81		1.90		86.6	65.7	34.8	3.0	5.25	64.0	3
85	1.70		4.85		80.4		5	0.6	17.5		81.81		1.90		91.6	70.0	32.5		5.00	61.0	3
90	2.46		4.85		85.4		5	0.7	26.6		86.79		2.70		96.5	74.0	90.5	3.0	14.30	174.0	2
95	2.46		4.85		90.4		5	0.7	28.2		91.82		2.70		101.6	76.3	83.5	3.5	11.50	164.0	2
100	2.46		4.85		95.2		5	0.7	29.2		96.80		2.70		106.5	82.5	77.5		10.90	155.0	2
110	2.46		4.85		105.2		5	0.7	32.8		106.81		2.70		116.6	90.7	69.0		10.10	143.0	1
115	2.46		4.85		110.2		5	0.7	34.4		111.81		2.70	-0.50	121.6	97.7	64.0		9.60	136.0	1
120	2.82		7.21		113.6	+1.0	7	0.7	60.6		115.21		3.10		129.7	143.0	134.0	3.5	20.20	290.0	2
125	2.82		7.21		118.6		7	0.7	63.0		120.22		3.10		134.7	155.0	127.0	4.0	17.30	280.0	2
130	2.82		7.21		123.6		7	0.7	65.6		125.22		3.10		139.7	166.0	121.0		16.70	270.0	1
140	2.82		7.21		133.0		7	0.7	70.6		135.23		3.10		149.7	180.0	108.0		15.50	250.0	1
145	2.82		7.21		138.0		7	0.7	73.0		140.23		3.10		154.7	186.0	102.0		14.80	240.0	1
150	2.82		7.21		142.9	+1.6	7	0.7	77.2		145.24		3.10		159.7	193.0	94.0	4.0	13.90	235.0	1
160	2.82		7.21		152.9		7	0.7	81.0		155.22		3.10		169.7	206.0	89.0		13.60	220.0	1
170	3.10		9.60		161.3		10	0.7	122.0		163.65		3.50		182.9	283.0	151.0	5.0	17.90	360.0	1
180	3.10		9.60		171.2		10	0.7	128.0		173.66		3.50		192.9	292.0	145.0		17.10	345.0	1
190	3.10		9.60		181.0	+1.8	10	0.7	139.0		183.64		3.50		202.9	311.0	140.0		16.20	328.0	1

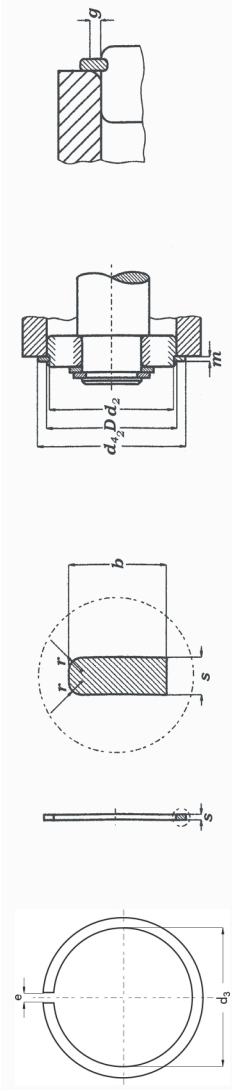

industrial - inox

ul. Władysława Łokietka 167B/a, 31-263 Kraków, tel./fax: 012 415 15 01
kom. 601 53 33 66, 504 25 99 11, e-mail: industrial@segey.com.pl www.segey.eu

PIERŚCIEŃ SP - DIN 5417

D	D A N E																					
	s	Δ	b	Δ	d_3	Δ	d_3	e	r	$r_{min.}$	Δ	d_2	Δ	m	Δ	d_{d_2}	FN (kN)	FR (kN)	g	FRg (kN)	K (kN/mm)	$n_{obl.}$ x1000 (rpm)
200	3.10		9.60		191.0		193.65	10	0.7	148.0		193.65		3.50		212.9	336.0		5.0	15.50	312.0	1.0
210	3.10		9.60		200.9		203.60	10	1.2	156.0		203.60		3.50	+0.3	222.8	356.0		6.0	12.30	298.0	1.0
215	3.10		9.60		205.9		208.60	10	1.2	160.0		208.60		3.50		227.8	376.0			11.90	288.0	1.0
225	3.50	-0.15	10.00		214.3		217.00	10	1.2	196.0	+1.8	217.00		4.50		237.0	462.0			17.10	414.0	1.0
230	3.50		10.00		219.2		222.00	10	1.2	200.0		222.00		4.50		242.0	473.0			16.80	406.0	1.0
240	3.50	-0.1	10.00		229.2		232.00	10	1.2	209.0		232.00		4.50		252.0	495.0		6.0	16.20	392.0	0.5
250	3.50		10.00		239.2		242.00	10	1.2	220.0		242.00		4.50	+0.4	262.0	514.0			15.40	373.0	0.5
260	3.50		10.00		247.5		252.00	10	1.2	230.0		252.00		4.50		272.0	536.0			15.00	362.0	0.5
270	3.50		10.00		257.5		262.00	10	1.2	240.0		262.00		4.50		282.0	556.0			14.40	348.0	0.5
280	3.50		10.00		267.5		272.00	10	1.2	250.0	+2.5	272.00	-0.50	4.50		292.0	578.0			13.90	335.0	0.5
290	3.50		10.00		277.5		282.00	10	1.2	260.0		282.00		4.50		302.0	598.0		6.0	13.40	323.0	0.4
300	4.50		12.00		284.5		290.00	10	1.5	400.0		290.00		5.50		314.0	694.0			33.00	795.0	0.6
310	4.50		12.00		294.0		300.00	10	1.5	412.0		300.00		5.50		324.0	800.0		7.0	27.30	770.0	0.5
320	4.50	-0.30	12.00		304.0		310.00	10	1.5	420.0		310.00		5.50		334.0	824.0			26.50	747.0	0.5
340	4.50		12.00		324.0		330.00	10	1.5	446.0		330.00		5.50		354.0	875.0			25.00	702.0	0.4
360	4.50	-0.2	12.00		343.0		350.00	10	1.5	475.0	+3.0	350.00		5.50	+0.5	374.0	930.0		7.0	23.40	660.0	0.4
370	4.50		12.00		353.0		360.00	10	1.5	485.0		360.00		5.50		384.0	955.0			22.70	640.0	0.4
380	4.50		12.00		363.0		370.00	10	1.5	500.0		370.00		5.50		394.0	995.0			22.40	630.0	0.4
400	4.50		12.00		383.0		390.00	10	1.5	525.0		390.00		5.50		414.0	1040.0			21.40	601.0	0.3

